

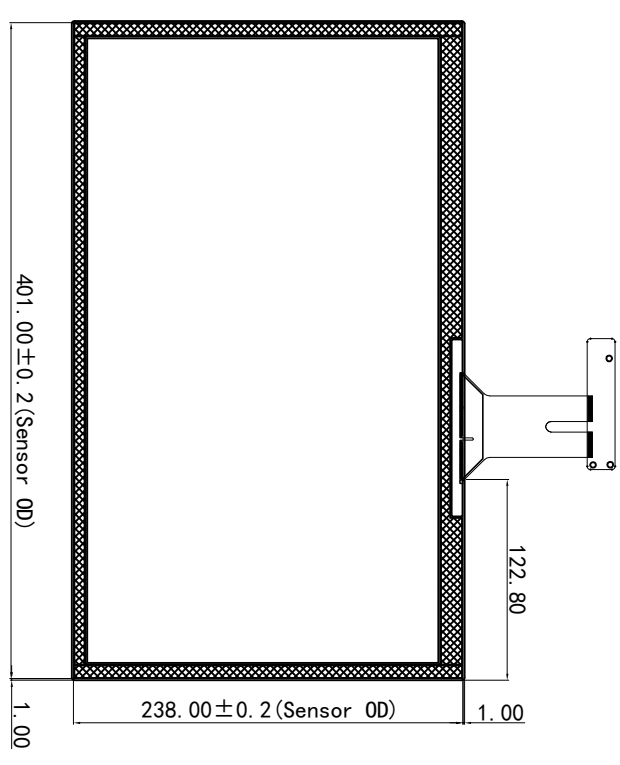
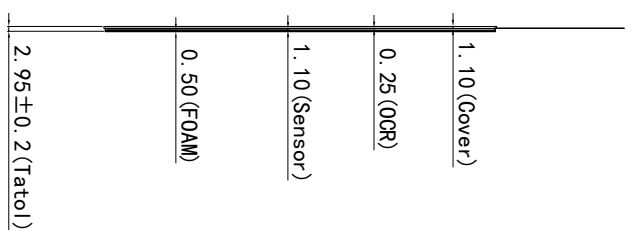



No ROHS hazardous material

Ordinal	Modify content description	Cartographer/date of change
Δ		
Δ		

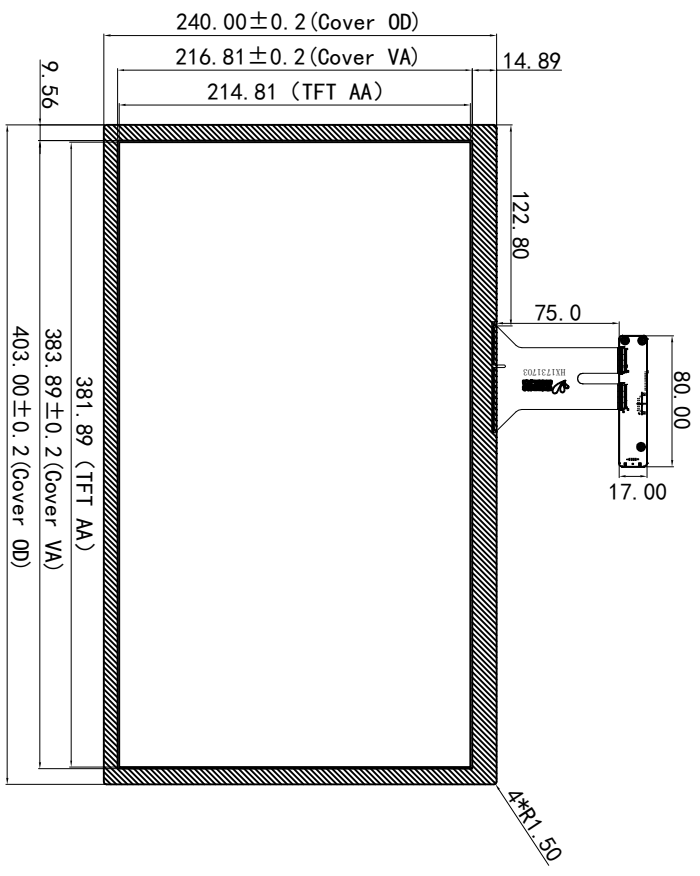

Screen printing area: Print Black

Front view



Frame paste foam area: 0.5mm

Back view

Technical parameters

1. Interfaces:	USB	7. Humidity range:	45~85%RH	USB Connector (J1)	
2. Structure :	G+G	8. Transmittance:	≥85%	1	VCC (5V)
3. IC solutions:	ILI2302M	9. Surface hardness:	≥6H	2	DN
4. Impact resistance:	30000A, 5000A, 5000A, 5000A, 5000A, 5000A	10. Operate :	-20°C~+70°C, ≤85%RH	3	DP
5. Touch points:	10 points	11. Storage :	-30°C~+80°C, ≤85%RH	4	GND
6. Power supply:	5V	12. Unmarked dimension tolerance	as ±0.5		



杭州宏毅科技有限公司
GraHowlet Technology CO., Ltd

Model	HX1731703		view direction	Unit	MM
Version	V3.0	Designer	LIU	Date	2017-10-23
Customer		Approved	HBZ	Date	2017-10-23
				Proportion	1:1